

GLUETEX

Seam Sealing Tapes

Seam sealing tapes are used to seal and proof seams of coated and breathable foils as well as technical fabrics.

The Gluetex GmbH offers two and three layer seam sealing tapes.

Two layer tapes consist of a hotmelt layer as well as a waterproof and higher melting outer layer.

Three layer seam sealing tapes have a hotmelt layer, a waterproof higher melting interlayer as well as a textile outer layer.

The textile varies in function and colour and can be adjusted to the customer's specific requirements.


Performance:

- Solvent-free adhesive
- The glued seam is right away leak-proof and ready to work under pressure
- The adhesive films are flexible and elastic
- Top surface suitable to the customer's fabric available
- Wide range of hotmelts with different technical performances (melting temperature, bonding etc.) available
- Different widths and thicknesses can be produced



Applications:

- Clothing
- Automobile branch
- Tent production
- Boat covers (persenning)
- Textile sun protection
- Medical technology
- Industrial applications

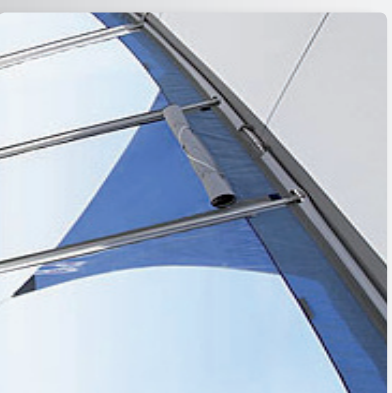

Seam Sealing Tapes

	2 layers - SST					3 layers - SST					
	740	764	770	788	800	805	810	811	813	820	828
Adhesive/Membrane/Top Surface	PE/U/-	U/U/-	U/U/-	U/U/-	A/U/-	A/U/N	U/MU/N	U/F/N	A/U/W	A/U/N	MU/U/N
Dry cleaner resistant	yes					no	yes	yes	no	no	yes

Good bonding with following materials:

Leather	√				√		√	√			
Polyester											
Polyurethane	√	√	√	√	√	√	√	√	√	√	√
PVC	√	√	√	√			√	√			
Polyamide					√	√	√		√	√	
Nylon					√	√	√		√	√	
Rubber	√							√			

Special materials:

Lycra	√						√				
Filter		√			√	√				√	√
Goretex	√				√	√	√	√	√	√	√
PTFE/ePTFE	√					√	√	√		√	√
Stedair	√			√		√		√		√	√
Travtech						√	√				√
Durotech		√	√	√							
Ultrex		√	√								

* All seam sealing tapes are washing resistant

A = Polyamide
N = Nylon

U = Polyurethane
PE = Polyester

F = ePTFF
MU = modified Polyurethane