

NEW Gluetex Products

Awning adhesive tape AU11118.200


The polyester adhesive tape AU111 for the confection of awnings has lower viscosity as usual polyester adhesive tapes. That grants an easier and faster penetration of the adhesive in the fabric. The result is a much better adhesion. For now the AU111 is just available in a width of 18mm.

If you are interested in this product please do not hesitate to ask for a sample!

Edge reinforcement tape BV 190

Our BV 190 is a PVC-adhesive tape with glass fiber reinforcement. It is mainly used for edge reinforcement on screen fabrics.

Standard width: 9mm
Standard length: 200m
Weight: 290g/m²



PVC Tent keder for tents and awnings

Our PVC-Keder is available in different colors and dimensions as well as single and twin flap.

Standard dimensions are:

Keder ø from 5,5mm – 13mm
Flap length from 20mm – 30mm
Length 100m oder 150m
Weight 450g/m² - 700g/m²
Available colors: white, grey, black

Other dimensions on demand.



If you have any questions about our products please contact us by telephone number (0049) 7742 92783093.

For more information please visit our website www.gluetex.de


Fabric lock TFA 7/40 for awnings

The fabric locks TFA 7/40 fix the fabrics in the drop bar and the roller tube without shortening the outreach of the fabric against the center seam. In contrast to expansion bolts clamps the Gluetex fabric lock the side seam central in the cord edge channel.



The fabric locks are an improvement for all awnings due to folding at the fabric edges will be prevented and the pressure on the hemstich seam in the edges will be reduced.

The fabric locks are made of aluminum and the clamp screw of stainless steel. Therefore the releasing and fixating of the awnings are possible at any time.

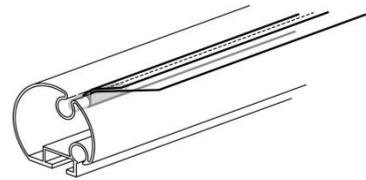

If you are interested in this product please do not hesitate to ask for a sample!

Polyester-Spiral-Zipper PRK4 for zip keder

Our zipper PRK4 has been especially developed for vertical outdoor sun protection systems, e.g. "Fixscreen", "ZipScreen", "Ventosol" or "ZipKeder".

It has a 10mm wide adhesive stripe which is placed very close to the outer edge to avoid that the edges unravel.

The spiral is asymmetric quilted and has a width of 4mm.

The melting temperature of the adhesive stripe is 115°C. The process temperature should be about 20°C – 30°C higher. The PRK4 is available in the widths 15mm and 20mm as well as in different colors (standard colors are grey, white and black).

The fastener PRK4 is especially suitable for ultra sonic welding, hot air welding, high frequency welding and thermal pulse welding.



**As well available in:
White
Black**

We are also at your disposal by email info@gluetex.de

For more information please visit our website www.gluetex.de